



PRODUCT DESCRIPTION

A compact fixture designed to seamlessly blend into outdoor or indoor surroundings. Featuring a timeless cylindrical design and refined finishes, it casts a welcoming glow that enhances architectural and landscape features. Built to endure harsh weather and impacts, this elegant light brings style and durability, whether mounted on walls or embedded in the ground, for long-lasting beauty and ambiance.

LED

IP65

IK06





PRODUCT SPECIFICATION

LIGHTING FEATURES

No. and Type of LED :	1pc High Efficacy COB
Average LED Life:	80% after 50000hrs
Color Temperature:	2200K to 5000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	1320lm / 1620lm

DIMENSION DRAWING

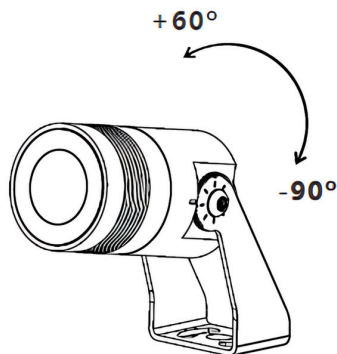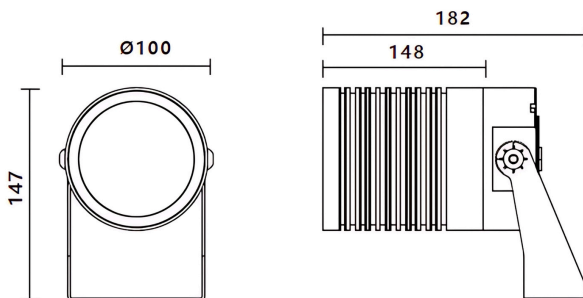

OPTICAL FEATURES

Beam Angle:	5° / 15° / 30° / 60°
Accessories:	Asymmetric Snoot / Honey comb / Spike / Rod with Spike / Tree Strap / Pole Mounted Hoop, Base (upon request)

ELECTRICAL FEATURES

Power:	18W / 24W
Voltage:	DC 24V / AC 220V
Control Protocol:	On-Off / DMX / Dali / 1-10V / Phase / PWM

MECHANICAL FEATURES

Dimensions:	Φ100 x H147mm x L182mm
Housing Material:	Aluminum Housing / Tempered Glass / SS304 Mounted Bracket
Finish:	Black / White / Grey / Customized
Mounting Type:	Surface Mounted (Ground / Wall)

GENERAL FEATURES

Ingress Protection:	IP 65
Operating Temp:	-35°C to 50°C
Impact Resistance:	IK 06
Insulation Class:	Class I / Class III
Power Cable:	Include 1m Neoprene Cable (customizable length)