



**PRODUCT DESCRIPTION**

A refined architectural LED fixture offering elegant, directional illumination to accentuate walls, facades, or pathways. Its clean, minimalist design and range of finishes allow it to harmonize effortlessly with modern interiors or landscapes. Ideal for both ground and wall installations, this fixture delivers a subtle yet dramatic lighting effect that enriches architectural form while blending seamlessly with contemporary design.

LED

IP65

IK06




**PRODUCT SPECIFICATION**

**LIGHTING FEATURES**

No. and Type of LED:	4pc High Power LEDs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 5000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	520lm / 810lm

**DIMENSION DRAWING**

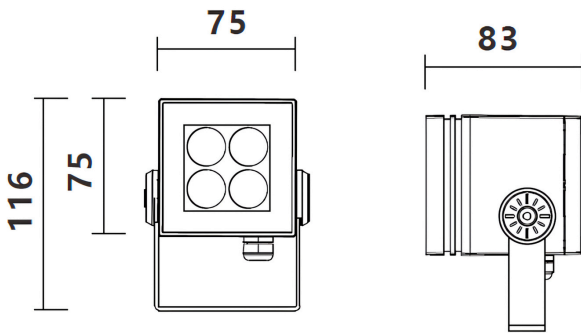

**OPTICAL FEATURES**


Beam Angle:	12° / 24° / 38° / 50° / 70*70° / 35*70° / 90*90°
Accessories:	Asymmetric Snoot / Honey comb/ Spike / Tree Strap /Pole Mounted Hoop, Base (upon request)

**ELECTRICAL FEATURES**

Power:	8W / 12W
Voltage:	DC 24V / AC 220V
Control Protocol:	On-Off / DMX / DALI / 1-10V / PWM

**MECHANICAL FEATURES**

Dimensions:	L75mm x W116mm x H83mm
Housing Material:	Aluminum Housing / Tempered Glass / SS304 Mounted Bracket
Finish:	Black / White / Grey / Customized
Mounting Type:	Surface Mounted (Ground and Wall)

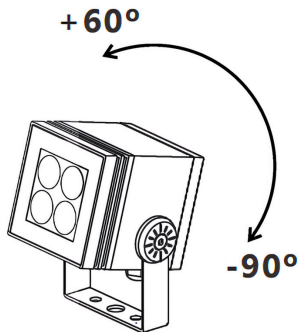

**GENERAL FEATURES**

Ingress Protection:	IP 65
Operating Temp:	-35°C to 50°C
Impact Resistance:	IK 06
Insulation Class:	Class I / Class III
Power Cables:	Include 1m Neoprene cable (customizable lengths)