

PRODUCT DESCRIPTION

A sleek recessed LED fixture offering vibrant RGB/RGBW or custom colors in a minimalist aluminum housing. Designed to integrate fluidly into floors, walls, or ceilings, it exudes understated elegance. Engineered for demanding environments, it boasts exceptional moisture and impact resistance, available in various finishes and mounting options. Durable, discreet, and visually refined, it delivers reliable performance with seamless installation.

LED

IP67

IK10




PRODUCT SPECIFICATION

LIGHTING FEATURES

No. and Type of LED:	12pcs / 24pcs SMD LEDs
Average LED Life: Color Temperature:	70% after 50000hrs 2200K to 5000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	360lm / 720lm

DIMENSION DRAWING

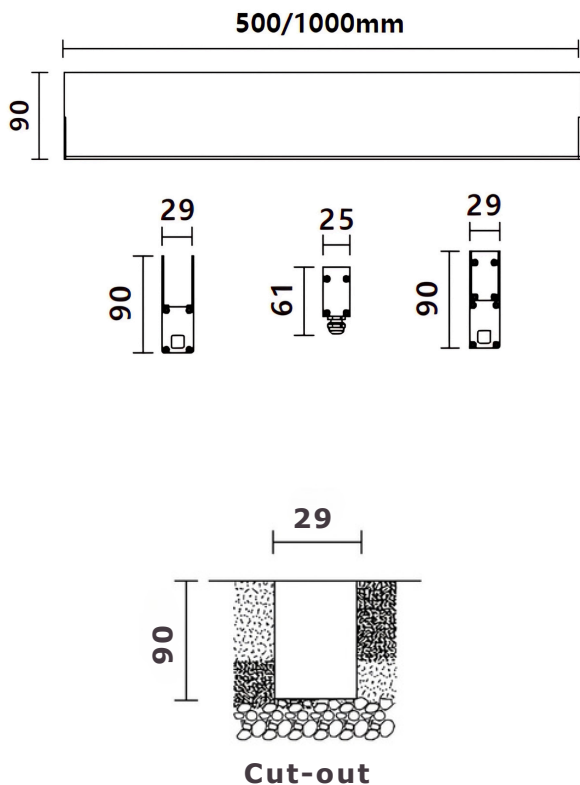

OPTICAL FEATURES

Beam Angle:	120°
Accessory:	NA

ELECTRICAL FEATURES

Power:	6W / 12W
Voltage:	DC 12V / DC 24V
Control Protocol:	On-Off / DMX / DALI / 1-10 V / PWM

MECHANICAL FEATURES

Dimensions:	L500mm / L1000mm x W29mm x H90mm
Housing Material:	Aluminum
Finish:	Anodizing / Grey / Black / White / Customized
Mounting Type:	Recessed (Ground, Wall, Ceiling)

GENERAL FEATURES

Ingress Protection:	IP 67
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 10
Insulation Class:	Class I Include 1m Neoprene Cable (customizable lengths)
Cable:	