



PRODUCT DESCRIPTION

This sleek, linear recessed LED is designed to sit flush within floors, walls, or ceilings. Encased in an elegant anodized aluminum frame topped with tempered glass, it brings a refined, minimalist aesthetic to any environment. Durable and waterproof, it's built to withstand outdoor use while casting a gentle, continuous ribbon of light, perfect for subtly highlighting architectural lines, pathways, or landscape features without drawing attention to the light source itself.

LED

IP67

IK08






PRODUCT SPECIFICATION

LIGHTING FEATURES

No. and Type of LED:	36pcs / 72pcs SMD LEDs
Average LED Life: Color Temperature:	70% after 50000hrs 2200K to 5000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	230lm / 460lm

DIMENSION DRAWING

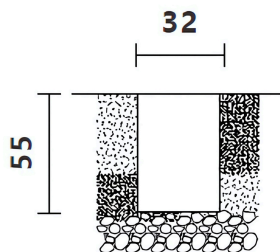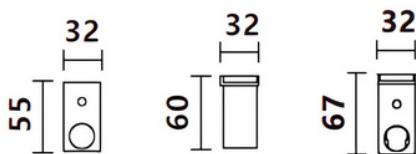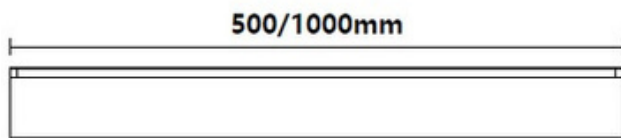

Cut-out

OPTICAL FEATURES

Beam Angle:	120°
Accessory:	NA

ELECTRICAL FEATURES

Power:	5W / 10W
Voltage:	DC 12V / DC 24V
Control Protocol:	On-Off / DMX / DALI / 1-10 V / PWM

MECHANICAL FEATURES

Dimensions:	L500mm / L1000mm W32mm x H67mm
Housing Material:	Aluminum / Tempered Glass
Finish:	Anodizing / Grey / Black / White / Customized
Mounting Type:	Recessed (Ground, Wall, Ceiling)

GENERAL FEATURES

Ingress Protection:	IP 67 From
Operating Temp:	-35°C to 50°C
Impact Resistance:	IK 08
Insulation Class:	Class I
Cable:	Include 1m Neoprene Cable (customizable lengths)