



PRODUCT DESCRIPTION

This low-profile recessed light offers vivid, high-impact illumination perfect for architectural highlighting, pathways, or focal features in both indoor and outdoor settings. Its robust construction ensures consistent performance in challenging weather, with customizable trim and finish options to suit a wide range of design palettes. Available in warm to cool and color-changing tones, it adapts beautifully to both residential and commercial ambiance needs.

LED

IP67

IK08




PRODUCT SPECIFICATION

LIGHTING FEATURES

No. and Type of LED:	16pcs High Power LEDs
Average LED Life:	70% after 50000hrs
Color Temperature:	2700K to 6000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	1920lm / 2360lm

DIMENSION DRAWING

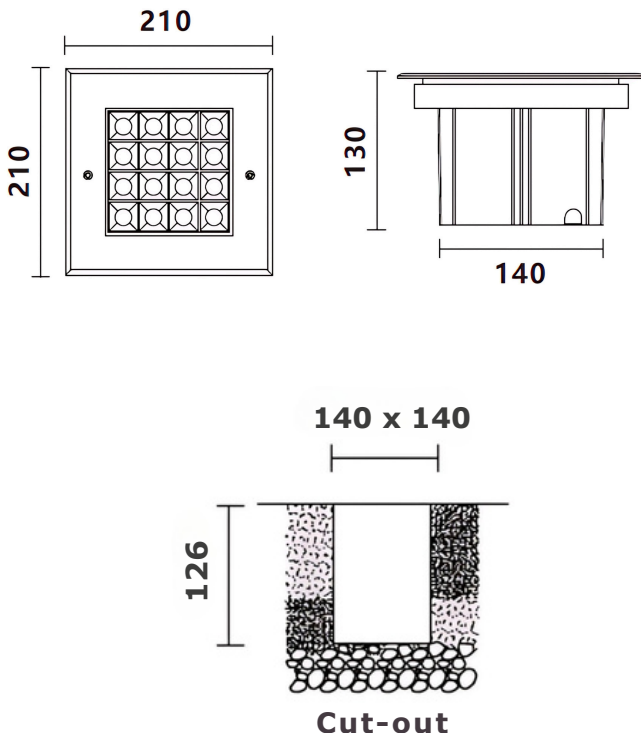

OPTICAL FEATURES

Beam Angle:	Narrow 10° / Spot 15° / Flood 25° / 40° / 60°
Accessory:	NA

ELECTRICAL FEATURES

Power:	24W / 30W
Voltage:	DC 12V / DC 24V / AC 220V
Control Protocol:	On-Off / DMX / DALI / 1-10 V / PWM

MECHANICAL FEATURES

Dimensions:	L210mm x W210mm x H130mm
Housing Material:	SS316 Flange Trim / Aluminum Body / Tempered Glass
Finish:	Steel Brush
Mounting Type:	Recessed (Ground / Wall / Ceiling)

GENERAL FEATURES

Ingress Protection:	IP 67
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 08
Insulation Class:	Class I / Class III
Cable:	Include 1m Neoprene Cable (customizable lengths)