


DIMENSION DRAWING

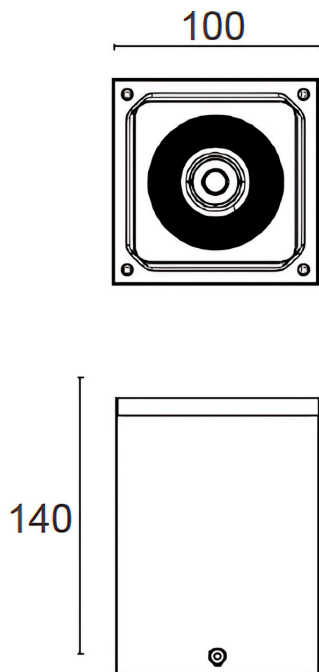

PRODUCT DESCRIPTION

A sleek, square outdoor surface-mounted downlight that brings a touch of modern elegance to architectural designs. Its streamlined shape and soft illumination enhance entryways or sheltered areas with subtle sophistication. Carefully crafted to harmonize with its environment, it emits a graceful, enveloping light that enriches the ambiance while remaining understated.

LED

IP65

IK05



PRODUCT SPECIFICATION

LIGHTING FEATURES

No. of LED:	1pcs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 6000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	960lm / 1170lm

OPTICAL FEATURES

Beam Angle:	5° / 12° / 24° / 38° / 60°
Accessory:	NA

ELECTRICAL FEATURES

Power:	9W / 15W
Voltage:	AC 220V (integrated driver)
Control Protocol:	On-Off / PWM / Phase / 1-10V / Dali / DMX

MECHANICAL FEATURES

Dimensions:	L100mm x W100mm x H140mm
Housing Material:	Aluminum / Tempered Glass / SS304 Bracket
Finish:	Black RAL9011 / White RAL9003, RAL9010 / Grey RAL9006 / Custom made
Mounting Type:	Surface Mounted

GENERAL FEATURES

Ingress Protection:	IP 65
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 05
Insulation Class:	Class I