




DIMENSION DRAWING

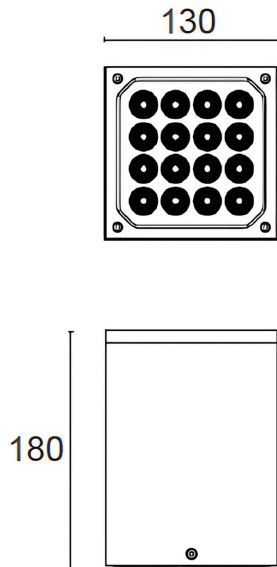

PRODUCT DESCRIPTION

This modern square surface-mounted downlight features a sleek, geometric design that adds a touch of refined elegance to any environment. Its compact shape integrates effortlessly into architectural spaces, providing soft, focused illumination. Designed to harmonize with both modern and transitional décor, this fixture enhances areas with a discreet yet sophisticated presence, creating an ambient charm without being overly conspicuous.

LED

IP65

IK05



PRODUCT SPECIFICATION

LIGHTING FEATURES

No. of LED:	16pcs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 6000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	1600lm / 2180lm

OPTICAL FEATURES

Beam Angle:	5° / 12° / 24° / 38° / 60°
Accessory:	NA

ELECTRICAL FEATURES

Power:	20W / 28W
Voltage:	AC 220V (integrated driver)
Control Protocol:	On-Off / PWM / Phase / 1-10V / Dali / DMX

MECHANICAL FEATURES

Dimensions:	L130mm x W130mm x H180mm
Housing Material:	Aluminum / Tempered Glass / SS304 Bracket
Finish:	Black RAL9011 / White RAL9003, RAL9010 / Grey RAL9006 / Custom made
Mounting Type:	Surface Mounted

GENERAL FEATURES

Ingress Protection:	IP 65
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 05
Insulation Class:	Class I