




## DIMENSION DRAWING

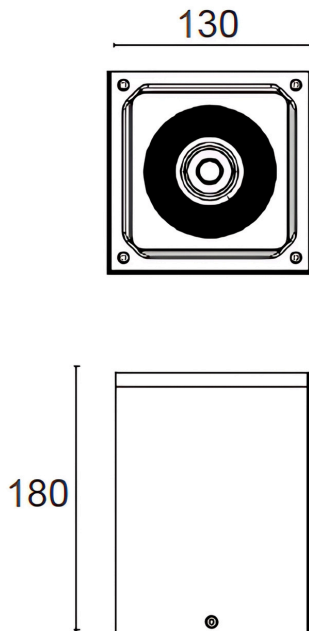

## PRODUCT DESCRIPTION

This sleek, compact square luminaire delivers focused and customizable illumination while blending durability with subtle design. Crafted with a clean metal housing, tempered glass front, and secure mounting bracket, it brings elegant functional lighting to both indoor and outdoor environments. Its modern aesthetic ensures it complements contemporary spaces without overwhelming the overall design.

LED

IP65

IK05



## PRODUCT SPECIFICATION

### LIGHTING FEATURES

No. of LED:	1pcs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 6000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	1600lm / 2180lm

### OPTICAL FEATURES

Beam Angle:	5° / 12° / 24° / 38° / 60°
Accessory:	NA

### ELECTRICAL FEATURES

Power:	20W / 28W
Voltage:	AC 220V (integrated driver)
Control Protocol:	On-Off / PWM / Phase / 1-10V / Dali / DMX

### MECHANICAL FEATURES

Dimensions:	L130mm x W130mm x H180mm
Housing Material:	Aluminum / Tempered Glass / SS304 Bracket
Finish:	Black RAL9011 / White RAL9003, RAL9010 / Grey RAL9006 / Custom made
Mounting Type:	Surface Mounted

### GENERAL FEATURES

Ingress Protection:	IP 65
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 05
Insulation Class:	Class I