

PRODUCT DESCRIPTION

This fixture delivers radiant illumination and a refined aesthetic—enhancing any setting whether embedded in walls, the ground, or ceiling. Designed for both form and function, it performs beautifully indoors or out, even in hot or humid environments. With customizable finishes to suit any taste, it offers a harmonious blend of elegance and practical adaptability.

LED

IP67

IK10



PRODUCT SPECIFICATION

LIGHTING FEATURES

No. and Type of LED:	3pcs / 2x3pcs / 3x3pcs / 4x3pcs SMD LEDs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 5000K
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	150lm / 2x150lm / 3x95lm / 4x95lm

OPTICAL FEATURES

Beam Angle:	-
Accessory:	Top cover options

ELECTRICAL FEATURES

Power:	1x3W / 2x3W / 3x2W / 4x2W (Built-in Driver / Remote Driver)
Voltage:	DC 24V / AC 220V
Control Protocol:	On-Off / DMX / DALI / 1-10 V / PWM


MECHANICAL FEATURES

Dimensions:	Ø120 x H61mm
Housing Material:	Aluminum / Steel / Brass
Finish:	Steel / Brass / Black / White / Grey / Custom made
Mounting Type:	Semi Recessed (Inground / Wall)

GENERAL FEATURES

Ingress Protection:	IP 67
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 10
Insulation Class:	Class I / Class III
Cable:	Include 1m Neoprene Cable (customizable lengths)

DIMENSION DRAWING

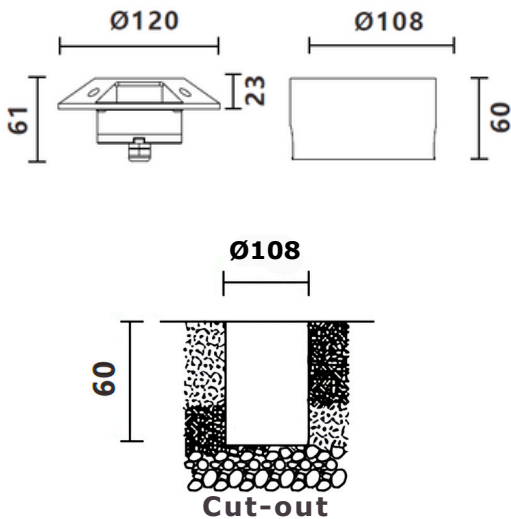

TOP COVER OPTIONS

