

PRODUCT DESCRIPTION

This elegant recessed downlight offers a harmonious blend of functionality and aesthetics, making it ideal for enhancing outdoor spaces. Its sleek design allows for seamless integration into walls or floors, providing subtle yet effective illumination. Built to withstand various weather conditions, it ensures long-lasting performance. Whether illuminating pathways, highlighting architectural features, or creating ambient lighting, this fixture adds a touch of sophistication to any setting.

LED

IP67

IK10



Dimmable

PRODUCT SPECIFICATION

LIGHTING FEATURES

No. and Type of LED:	5pcs / 2x5pcs / 3x5pcs / 4x5pcs SMD LEDs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 5000K
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	280lm / 2x280lm / 3x210lm / 4x180lm

OPTICAL FEATURES

Beam Angle:	-
Accessory:	Top cover options

ELECTRICAL FEATURES

Power:	1x5W / 2x5W / 3x4W / 4x3W (Built-in Driver / Remote Driver)
Voltage:	DC 24V / AC 220V
Control Protocol:	On-Off / DMX / DALI / 1-10 V / PWM


MECHANICAL FEATURES

Dimensions:	Ø150 x H61mm
Housing Material:	Aluminum / Steel / Brass
Finish:	Steel / Brass / Black / White / Grey / Custom made
Mounting Type:	Semi Recessed (Inground / Wall)

GENERAL FEATURES

Ingress Protection:	IP 67
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 10
Insulation Class:	Class I / Class III
Cable:	Include 1m Neoprene Cable (customizable lengths)

DIMENSION DRAWING

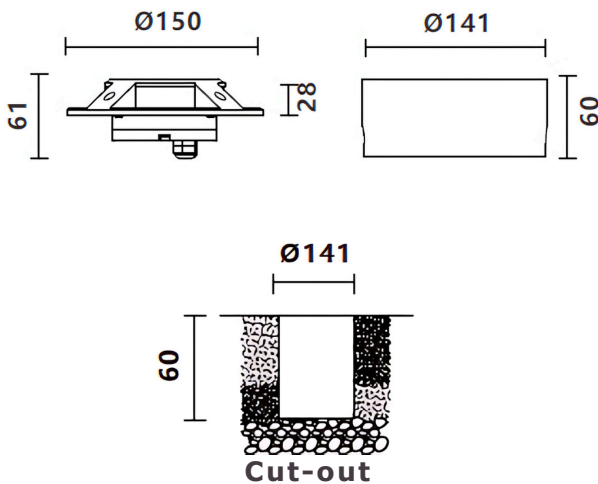

TOP COVER OPTIONS

