



PRODUCT DESCRIPTION

This floodlight casts vibrant, customizable illumination that effortlessly enhances outdoor spaces or architectural features. With a sleek design and durable build, it brings both mood and visibility to any setting. Whether used for ambiance, security, or highlighting design elements, it serves as a stylish, dependable lighting solution that adapts to your environment, making every scene brighter and more engaging.

LED

IP66

IK05



PRODUCT SPECIFICATION

LIGHTING FEATURES

No. of LED:	24pcs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 6000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	3600lm / 4500lm

OPTICAL FEATURES

Beam Angle:	5° / 15° / 24° / 38° / 50° / 40*40° / 60*60° / 35*70° / 80*80° / Asymmetric
Accessory:	Anti Glare Shield

ELECTRICAL FEATURES

Power:	48W / 60W (Integrated Driver)
Voltage:	AC 220V
Control Protocol:	On-Off / DMX / DALI / 1-10 V / PWM / DMX + RDM



MECHANICAL FEATURES

Dimensions:	L347mm x W88mm x H400mm
Housing Material:	Aluminum / Tempered Glass / SS304 Bracket
Finish:	Black / White / Grey / Custom made
Mounting Type:	Surface Mounted

GENERAL FEATURES

Ingress Protection:	IP 66
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 05
Insulation Class:	Class I

DIMENSION DRAWING

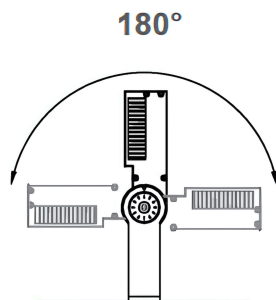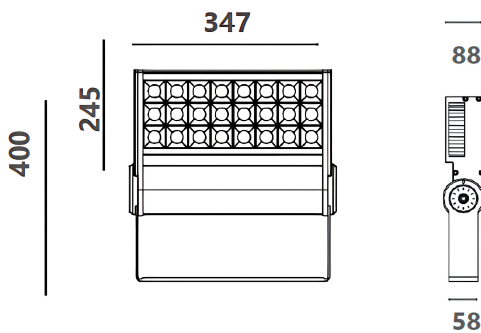

180°