



## PRODUCT DESCRIPTION

Cast a dazzling and adaptable glow with a robust, sleek LED floodlight crafted from resilient aluminum and tempered glass. It delivers vibrant, customizable illumination across a spectrum of warm to cool hues, including RGB and RGBW options. Built to endure moisture, dust, and impact, it's ready for harsh environments. Stylish and dependable, it elevates both performance and ambiance, enhancing your outdoor space with precision, flair, and enduring brilliance.

LED

IP66

IK05



## PRODUCT SPECIFICATION

### LIGHTING FEATURES

No. of LED:	36pcs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 6000K / RGB / RGBW
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	5760lm / 6750lm

### OPTICAL FEATURES

Beam Angle:	5° / 15° / 24° / 38° / 50° / 40*40° / 60*60° / 35*70° / 80*80° / Asymmetric
Accessory:	Anti Glare Shield

### ELECTRICAL FEATURES

Power:	72W / 90W (Integrated Driver)
Voltage:	AC 220V
Control Protocol:	On-Off / Phase / DMX / DALI / 1-10 V / PWM / DMX + RDM



### MECHANICAL FEATURES

Dimensions:	L500mm x W88mm x H400mm
Housing Material:	Aluminum / Tempered Glass / SS304 Bracket
Finish:	Black / White / Grey / Custom made
Mounting Type:	Surface Mounted

### GENERAL FEATURES

Ingress Protection:	IP 66
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 05
Insulation Class:	Class I

## DIMENSION DRAWING

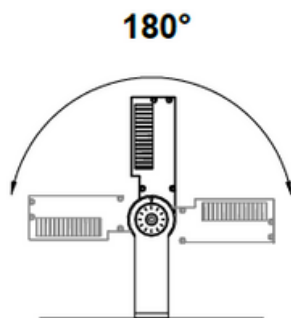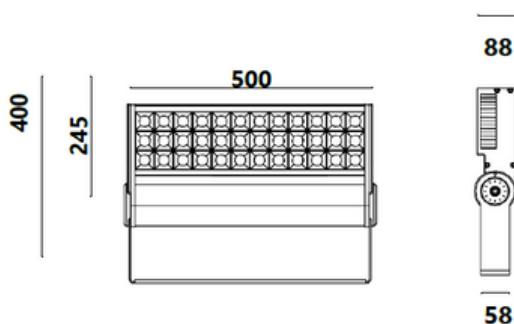

180°