




DIMENSION DRAWING

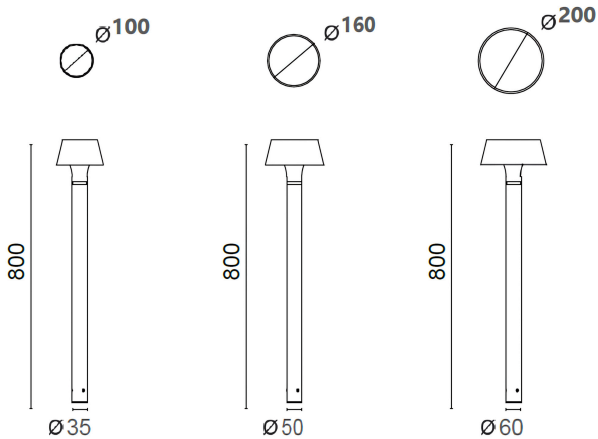

PRODUCT DESCRIPTION

This contemporary bollard light blends minimalist design with long-lasting performance, making it ideal for pathways, gardens, and public landscapes. Its sleek cylindrical form and flat-topped head offer a modern aesthetic that fits effortlessly into any setting. Built with durable materials and available in custom finishes, it provides reliable, glare-free illumination while enhancing the ambiance of outdoor environments, day or night.

LED

IP65

IK08



Dimmable

PRODUCT SPECIFICATION

LIGHTING FEATURES

No. of LED:	1pcs
Average LED Life:	70% after 50000hrs
Color Temperature:	2200K to 6000K
CRI:	Ra80+ / Ra90+
Lumen Output at Source:	-
Total Delivered Lumens:	-

OPTICAL FEATURES

Beam Angle:	-
Accessory:	NA

ELECTRICAL FEATURES

Power:	6W / 12W / 24W
Voltage:	AC 110V - 120V / AC 220V - 240V
Control Protocol:	On-Off / PWM / Phase / 1-10V / Dali / DMX / DMX+RDM

MECHANICAL FEATURES

Dimensions:	D100mm x H800mm / D160mm x H800mm / D200mm x H800mm
Housing Material:	Aluminum / Tempered Glass
Finish:	Black RAL9011 / White RAL9003 , RAL9010 / Grey RAL9006 / Custom made
Mounting Type:	Surface Mounted

GENERAL FEATURES

Ingress Protection:	IP 65
Operating Temp:	From -35°C to 50°C
Impact Resistance:	IK 08
Insulation Class:	Class I