




## DIMENSION DRAWING

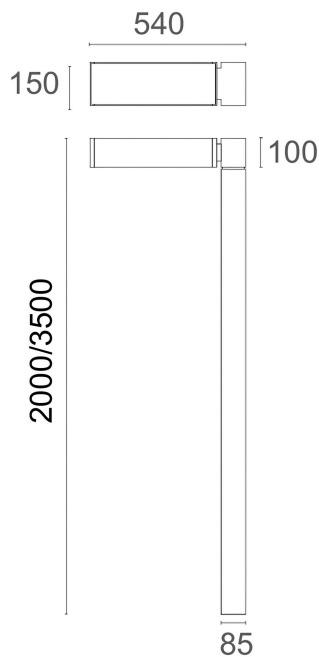

## PRODUCT DESCRIPTION

This sleek and minimalistic outdoor lighting fixture features a refined rectangular head perched atop a sturdy post, an elegant addition to streetscapes, garden paths, or modern architectural environments. Its clean, geometric silhouette brings a sense of deliberate balance and visual harmony to its surroundings. Designed for seamless integration, it subtly enhances the space with its understated style while providing consistent illumination.

LED

IP65

IK05



## PRODUCT SPECIFICATION

### LIGHTING FEATURES

|                         |                    |
|-------------------------|--------------------|
| No. of LED:             | -                  |
| Average LED Life:       | 70% after 50000hrs |
| Color Temperature:      | 3000K to 6000K     |
| CRI:                    | Ra80+ / Ra90+      |
| Lumen Output at Source: | -                  |
| Total Delivered Lumens: | 3000lm / 5000lm    |

### OPTICAL FEATURES

|             |    |
|-------------|----|
| Beam Angle: | -  |
| Accessory:  | NA |

### ELECTRICAL FEATURES

|                   |                             |
|-------------------|-----------------------------|
| Power:            | 30W / 50W                   |
| Voltage:          | AC 220V (Integrated Driver) |
| Control Protocol: | On-Off / DALI               |

### MECHANICAL FEATURES

|                   |   |
|-------------------|---|
| Dimensions:       | L540mm x W150mm x H100mm  |
| Pole Top:         | D76mm   |
| Housing Material: | Aluminum / PMMA Diffuser  |
| Finish:           | Black RAL9011 / White RAL9003 ,<br>RAL9010 / Grey RAL9006 / Custom made |
| Mounting Type:    | Surface Mounted   |

### GENERAL FEATURES

|                     |                    |
|---------------------|--------------------|
| Ingress Protection: | IP 65              |
| Operating Temp:     | From -35°C to 50°C |
| Impact Resistance:  | IK 05              |
| Insulation Class:   | Class I            |