

LINEAR WALL WASHER | AA-LWW-3W



PRODUCT DESCRIPTION

This chain-type LED wall washer features interconnected modules for flexible bending to fit various architectural designs. It has a durable aluminum housing for heat dissipation and efficient optical lenses for uniform illumination. With an IP65/IP66 rating, it offers water and dust protection, making it suitable for facades, bridges, landmarks, and landscape lighting projects.

IP66

IK08

ON
OFF


DC
24V

CE


PRODUCT SPECIFICATION

IP Rating	66
IK Rating	8
Source Type	High power LED
Source Life Time	>50,000h at 25°C Ambient Temperature
CRI	>90
Step McAdam	3
Source Flux	480 lm
Source Efficiency	120 lm/W
Delivered Flux	320 lm
Delivered Efficiency	80 lm/W
Input Power	4 W
Supply Voltage	24V DC
Insulation Class	Class III
Power Supply	DONE driver Constant Current
Material	Aluminum
Light Color / CCT	3000K / 4000K / 6000K
Beam Angle	15° / 24° / 36° / 60°
Mounting	Surface Mounted
Reflector Color	-
Finish	White / Black / Dark Gray

TECHNICAL DRAWING

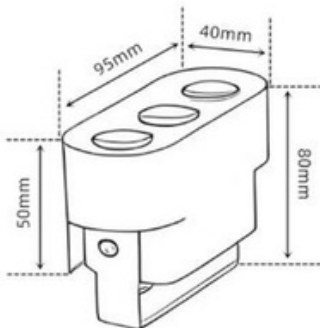

PHOTOMETRICS

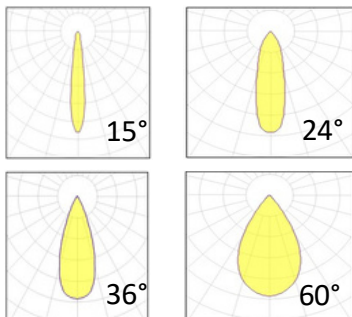

Temperature Limits

Working Temperature	-30C° to +50C°
Storage Temperature	-50C° to +80C°

Light Control

ON -OFF

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel