

**PRODUCT DESCRIPTION**

This recessed LED downlight combines sleek design with robust performance, making it ideal for both residential and commercial spaces. Its high-quality aluminum housing ensures durability, while the adjustable spring-loaded retention tabs provide secure installation. The fixture is certified for direct contact with insulation, offering flexibility in various ceiling configurations. Available in multiple finishes and beam angles, it seamlessly integrates into diverse interior styles.

LED

IP43

IK08

CE

**PRODUCT SPECIFICATION**

**LIGHTING FEATURES**

Type of LED:	High Power LEDs
Average LED Life:	>50,000h at 25°C Ambient Temperature
Color Temperature:	3000K / 4000K / 6000K
CRI:	Ra90+
Lumen Output at Source:	120 lm/w
Total Delivered Lumens:	3200lm

**OPTICAL FEATURES**

Beam Angle:	15° / 24° / 36°
Accessory:	NA

**ELECTRICAL FEATURES**

Power:	4 x 10W (OSRAM driver constant current)
Voltage:	AC 220V-240V
Control Protocol:	On-Off



**MECHANICAL FEATURES**

Dimensions:	85mm x 168.5mm x 168.5mm, cut size: 155mm x 155mm
Housing Material:	Aluminum
Finish:	Black / White
Mounting Type:	Ceiling Recessed

**GENERAL FEATURES**

Ingress Protection:	IP 43
Operating Temp:	From -30°C to 50°C
Impact Resistance:	IK 08
Insulation Class:	Class III

**DIMENSION DRAWING**

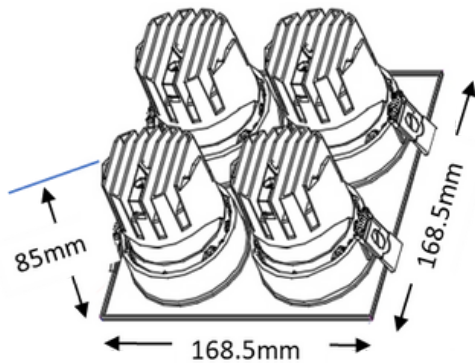

cut size:155\*155mm